



SPACE-RAY®

LRU/LRL Radiant Tube Series

Part L 2010 compliant

- Six input ratings: 15kW to 47kW available in Linear and 'U' models
- 'Herringbone' link flue systems available with all 'U' and Linear models
- Heat treated Aluminised Calorised emitter tube surface - for flake free and cleaner working environment
- Natural Gas and Propane
- **Aluminium reflectors** - the tested and proven superior material - designed to maximise downward radiant heating effect
- Lightweight construction - **4" tubes supplied in 3m sections** - easy to assemble and fit
- CE Approved
- Efficient and cost saving heating method
- Made in the UK under our ISO9001:2008 quality assured system - all units test fired before despatch

www.spaceray.co.uk





SPACE-RAY® Heating Systems



SPECIFICATION GUIDE - LRU/LRL SERIES PART L 2010 COMPLIANT												
Model No.	LRU15	LRU 25	LRU 30	LRU 35	LRU 40	LRU 45	LRL 15	LRL 25	LRL 30	LRL 35	LRL 40	LRL 45
Heat Input, kW Hs	15.0	23.0	29.2	34.5	42.2	47.0	15.0	23.0	29.2	34.5	42.2	47.0
Heat Input, kW Hi	13.5	20.7	26.3	31.1	38.0	42.3	13.5	20.7	26.3	31.1	38.0	42.3
Length mm - A	3100	5385	5510		6970		5495	10065	9955		13000	
Width mm - B	460		715				460	340				
Height mm - C	175		210				175	180				
Weight Kg	31	47	66		81		27	46	62		79	
Gas Connection	R - 1/2											
Supply Pressure	Natural Gas - 20mbar Propane - 37mbar											
Electrical Supply	230v~50Hz 125W, Current rating 0.55A, fuse externally 3A											
Flue Diameter	127mm Dia. or 100mm Dia.											
Air Inlet Connection	101.6mm Dia.											

RECOMMENDED MOUNTING HEIGHT RANGE (General guidance only)						
Model No.	LRU/LRL 15	LRU/LRL 25	LRU/LRL 30	LRU/LRL 35	LRU/LRL 40	LRU/LRL 45
Horizontal m	2.4 - 6.0	3.0 - 8.0	3.8 - 10.0	4.0 - 12.5	4.8 - 13.5	5.6 - 15.0
Angled > 30° m	2.1 - 4.5	2.7 - 5.0	3.3 - 7.0	3.7 - 8.0	4.0 - 9.0	4.8 - 11.0

MINIMUM CLEARANCES TO COMBUSTIBLE MATERIAL - MM						
Model No.	SIDE	ABOVE	BELOW	END	FRONT	REAR
LRU/LRL 15	450	450	1220	450	575	305
LRU/LRL 25	510	450	1220	510	610	305
LRU/LRL 30 - 45	760	610	2285	610	760	380

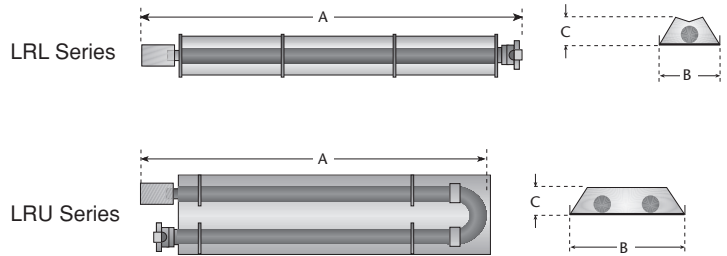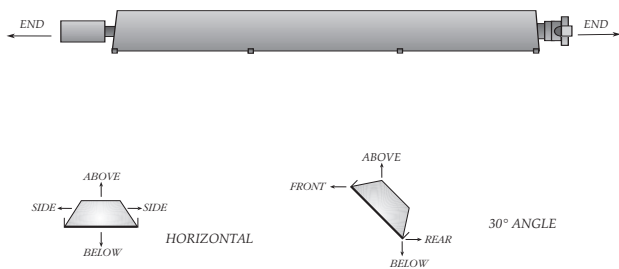

For more information contact:

Distributor/Agent:

Gas Fired Products (UK) Ltd, Chapel Lane, Claydon, Ipswich, Suffolk IP6 0JL UK
 Telephone: (01473) 830551 Fax: (01473) 832055 Email: info@spaceray.co.uk Website: www.spaceray.co.uk

We reserve the right to alter specifications without prior notice.

FACTORIES: ■ IPSWICH, ENGLAND ■ CHARLOTTE, N.C., U.S.A.